
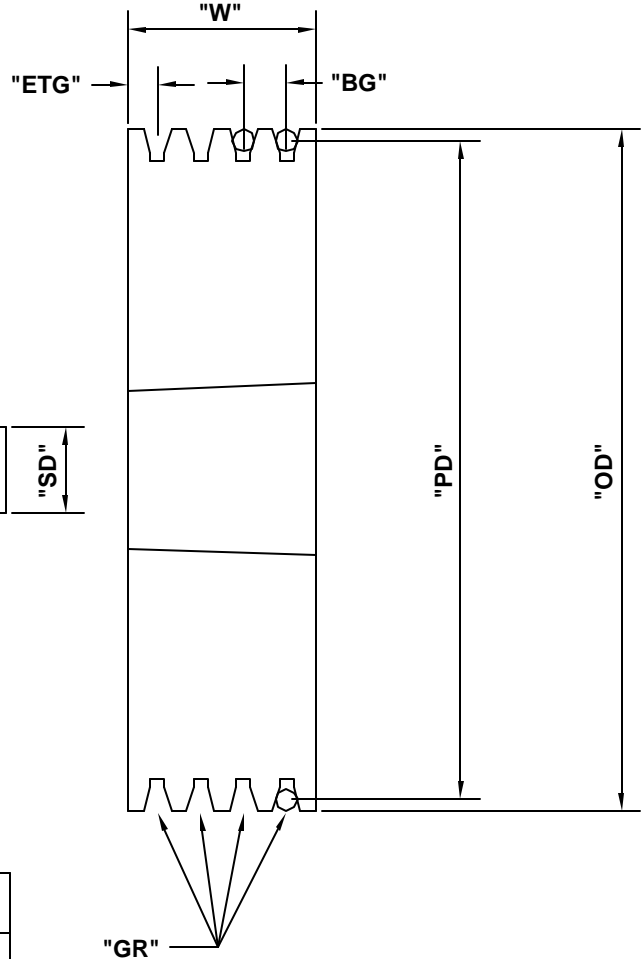



If the sheave you need does not match any shown on our parts site, fill out this form completely and fax it to us. We will review the information and suggest a comparable replacement if possible.

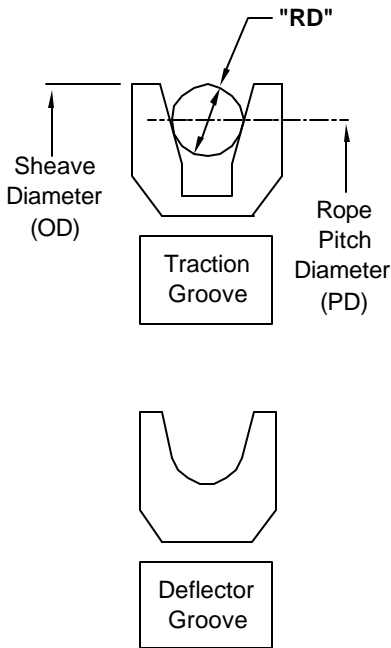

Please furnish the following information

Type of Sheave Req'd	<input type="checkbox"/> Traction	<input type="checkbox"/> Deflector
		Values
Sheave Diameter	"OD"	
Rope Pitch Dia.	"PD"	
Number of Grooves	"GR"	
Wire Rope Diameter	"RD"	
Distance Between Grooves	"BG"	
Mounting Shaft Diameter	"SD"	
Edge to 1st Grv. Center	"ETG"	
Sheave Width	"W"	

Note:

All Sheaves are bored for a Taper-Lock Bushing.
 Deflector Sheaves 8" diameter and smaller may be furnished with bearings for use on a dead shaft unless otherwise indicated.

Approval Information

Proceed based on given information
 Drawings for approval not required.

Furnish drawing for approval.

By: _____

Date: _____

Company: _____

Phone: _____

Note:

Non-stock sheaves, made to furnished information, are special order and are not returnable due to incorrect information.

Matot Inc.
 2501 Van Buren
 Bellwood, IL 60104
 Fax: 708-547-1608

Submit your part orders 24/7 at www.matot.com

DWG. #
SHEAVE SURVEY 2